




tilebrick™ |

the latest building revolution

An extruded durable clay unit with clever profiled edges and a tile-shaped front face which replicates a tile-hung wall elevation when mortared together. Tile-hung elevations are frequently chosen between first floor level and eaves to create a decorative alternative to brickwork.

The Tilebrick™ now enables a bricklayer to continue from ground level to eaves using traditional brick and block construction with none of the additional costs and skill requirements associated with traditional tile-hanging. It looks like traditional tile-hanging, yet has the benefits of structural masonry.

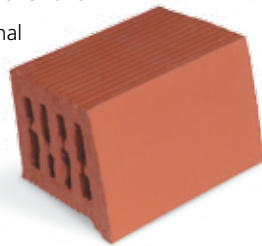

Apartments, Bermondsey, London
Tilebrick™ Smooth Blue



Sanfaced Brown

9801



Sanfaced Orange

9820



Sanfaced Red Multi

9841



Smooth Blue

9860





Smooth Red

9840



Sanfaced Red

9800

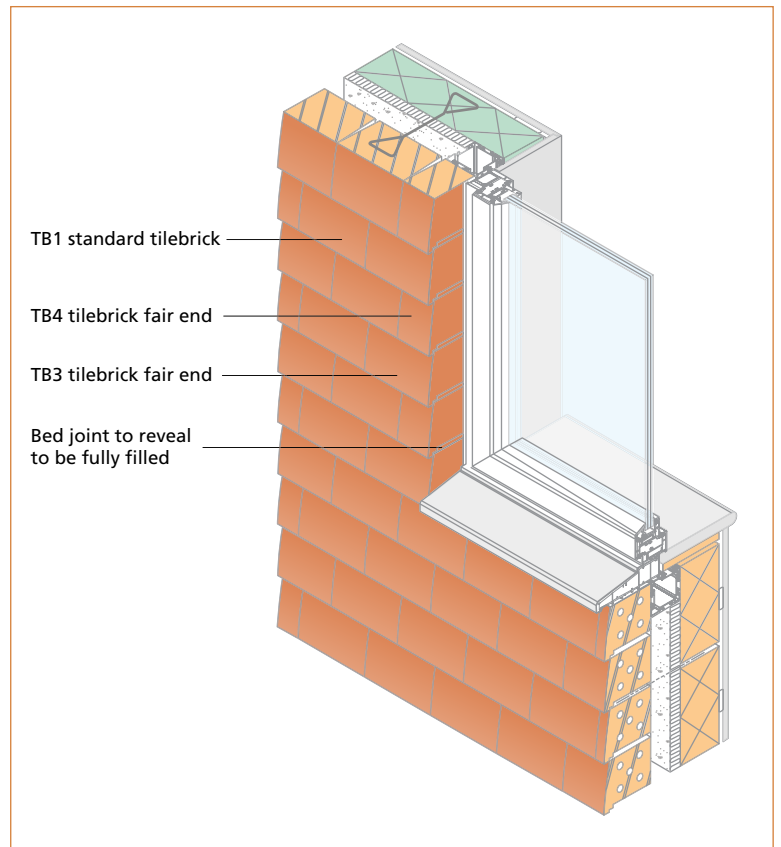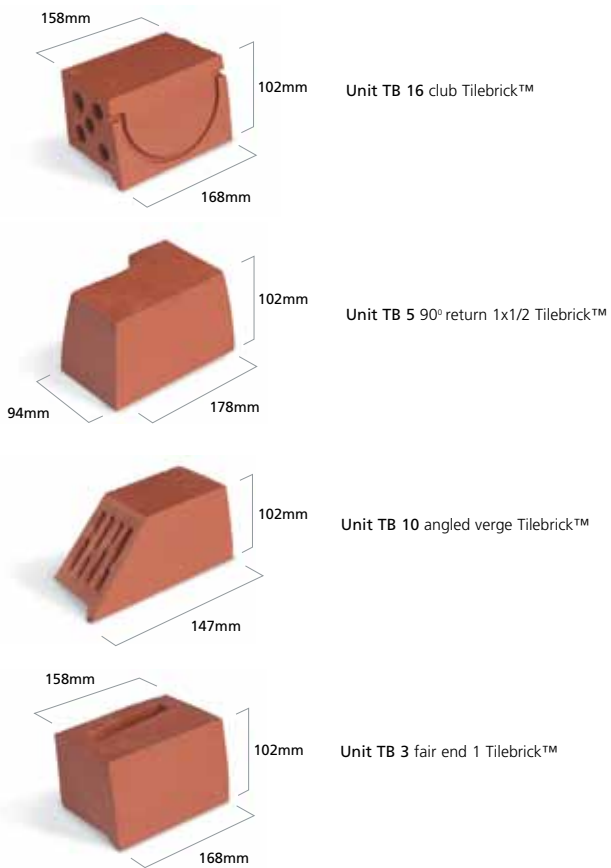

Isometric of window jamb detail

	Durability*	Compressive Strength (\geq N/mm ²)*	Water Absorption (%)*	Size (mm)	Type	Configuration	Factory and Location	Product Code
Tilebrick™ Sandfaced Brown	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Cattybrook, Bristol	9801
Tilebrick™ Sandfaced Orange	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Cattybrook, Bristol	9820
Tilebrick™ Sandfaced Red	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Cattybrook, Bristol	9800
Tilebrick™ Sandfaced Red Multi	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Cattybrook, Bristol	9841
Tilebrick™ Smooth Blue	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Lodge Lane, Cannock	9860
Tilebrick™ Smooth Red	F2	20	5	168 x 102 x 102	Wirecut Extruded	Horizontally Perforated	Cattybrook, Bristol	9840

* When tested in accordance with BS EN771-1.